


نمایشگر مدل CI1560 به همراه ۴ خروجی فرمان قابلیت اتصال به رایانه و نمایش وزن از طریق درگاه RS232 را دارد. برای این امر ابتدائاً باید تنظیمات زیر را در نمایشگر انجام داده و مشابه آن را در رایانه محیا نماییم. کابل ارتباطی بین نمایشگر و رایانه باید به صورت ذیل متصل باشد :

### Serial Interface (RS-232C)

#### ■ Connecting with PC

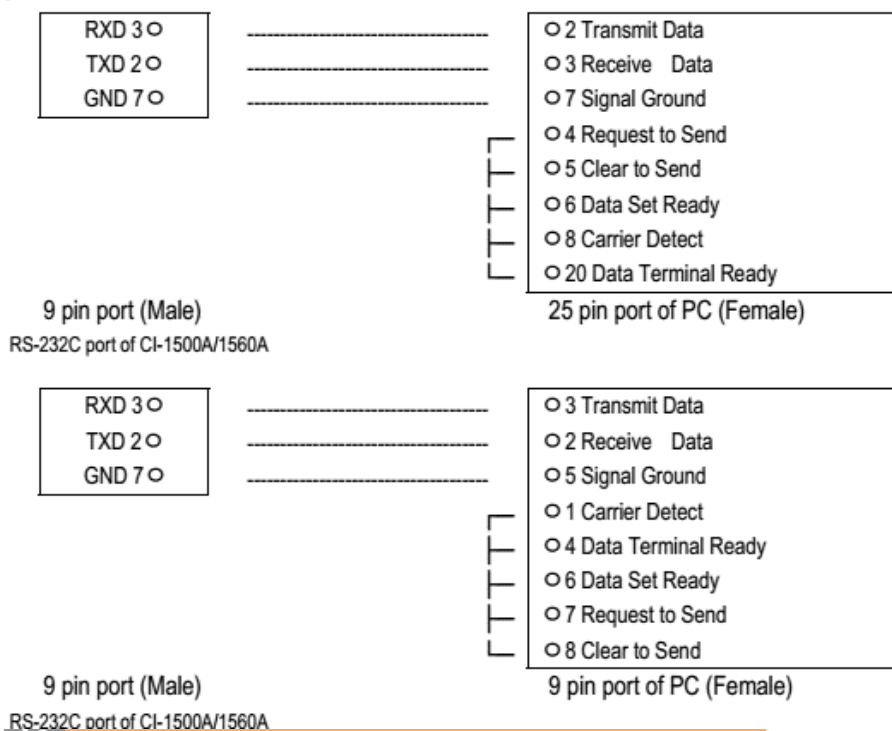

در ادامه سه تنظیم F03، F11 و F12 در نمایشگر به ترتیب بیانگر تخصیص درگاه نمایشگر، سرعت پهنای باند ارتباطی و زمان ارسال داده می باشند که حالت زیر پیشنهاد می گردد :

### F03

Function	Serial port usage	
	Display	Description
Set value (0 ~ 2)	F03 0	Not used
	F03 1	Connection to serial printer
	F03 2	Connection to P.C or remote display

### F11

Function	Baud rate set	
	Display	Description
Set value (0 ~ 5)	F11 0	600 bps
	F11 1	1200 bps
	F11 2	2400 bps
	F11 3	4800 bps
	F11 4	9600 bps
	F11 5	19200 bps

► Note 1. It shall be just in 2 of F03.

### F12

Function	Data set sent to Computer	
	Display	Description
Set value (0 ~ 3)	F12 0	No data out put
	F12 1	Transmission in state of stable or unstable
	F12 2	Transmission only in stable state
	F12 3	Transmission only when requiring data